2.2. Email client setting (IMAP)

In this item, we will explain the setting method that can be received by IMAP with email client. The manual "1.4 POP / IMAP permission setting" needs to be done in advance.


2.2 Email client setting

2.2.1 IMAP reception setting
2.2.2 Email client setting (POP)
2.2.3 How to set mailing list address as sender


2.2. Email client setting
2.2.1. IMAP reception setting

In this section, we will explain how to add a new TUMail (Gmail) account with IMAP settings in the email client Mac Mail App.
The manual "1.4 POP / IMAP permission setting" needs to be set in advance.


1. Click “Mail”, and click “Add Account”.

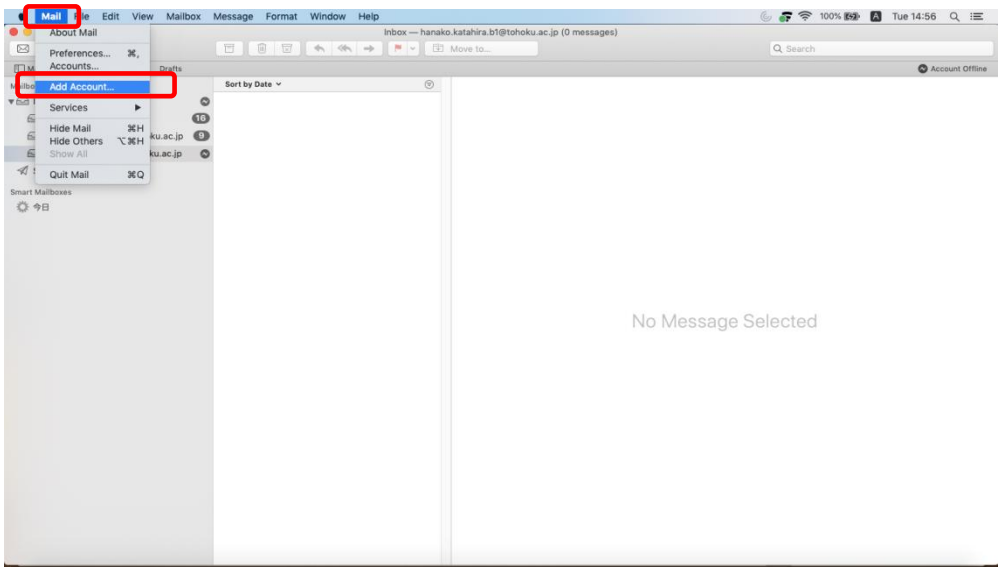


2. Click “Google”, and click “Continue”.

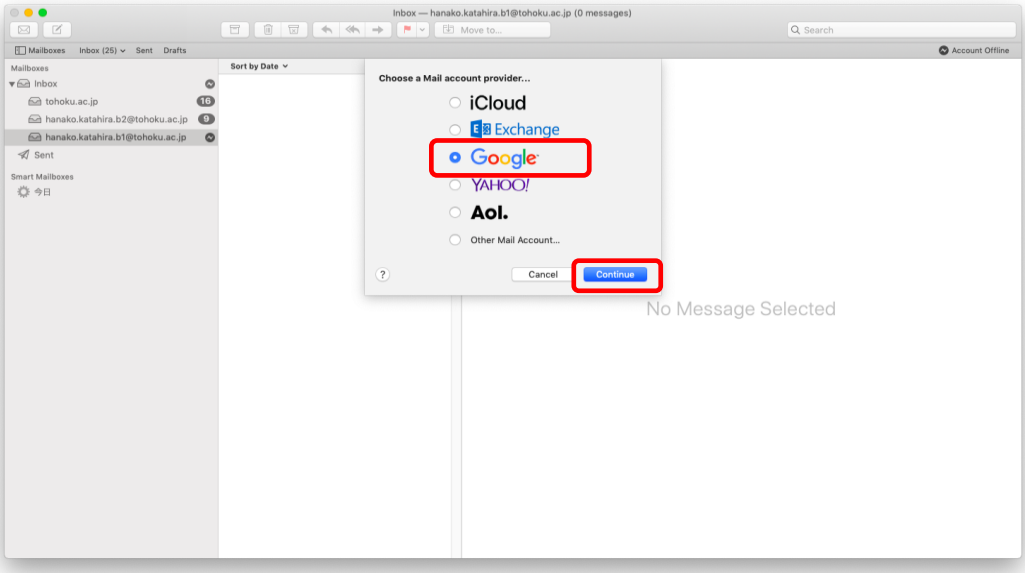


3. Click “Open Safari”.

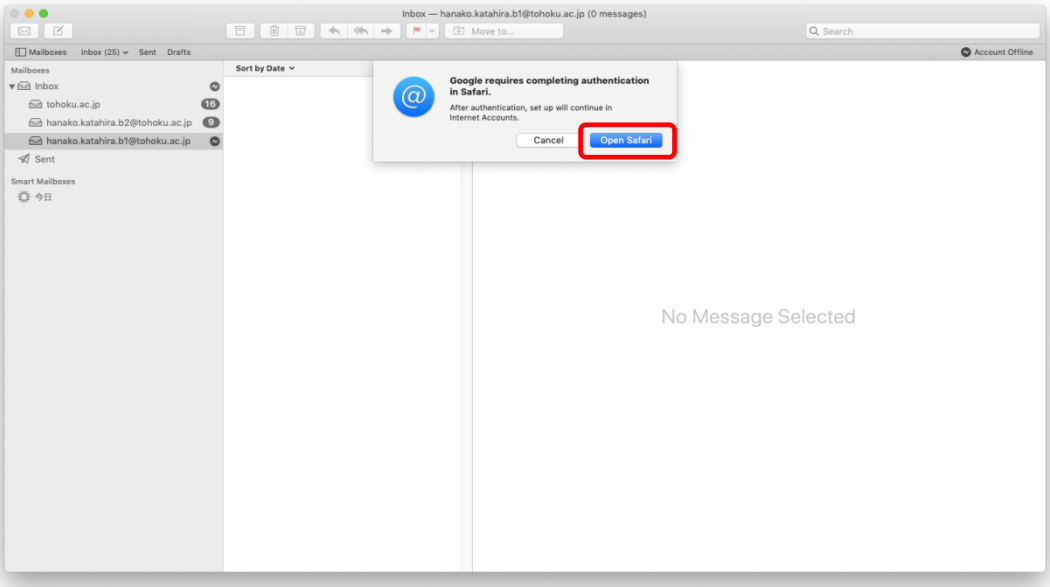


4.Enter your TUMail address, and click “Next”.

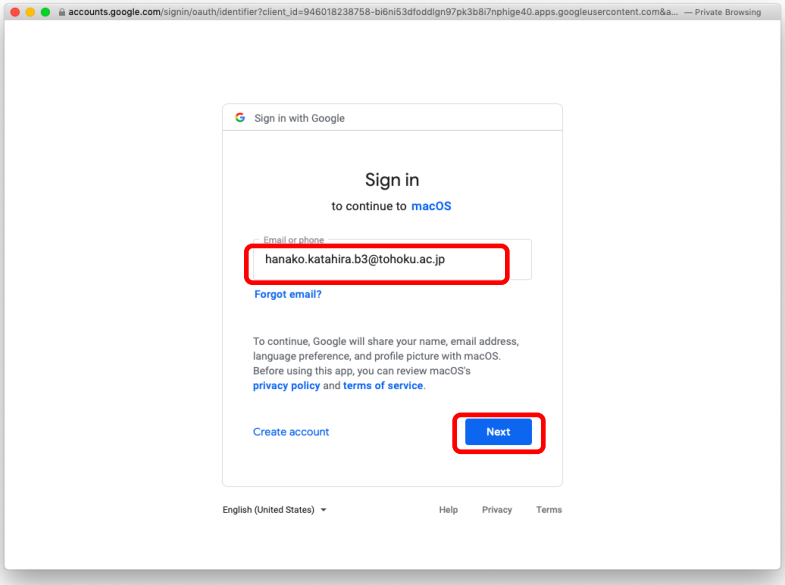

5. Enter the password set in "1.1 Login to New TUMail" in the manual, and click “Next".

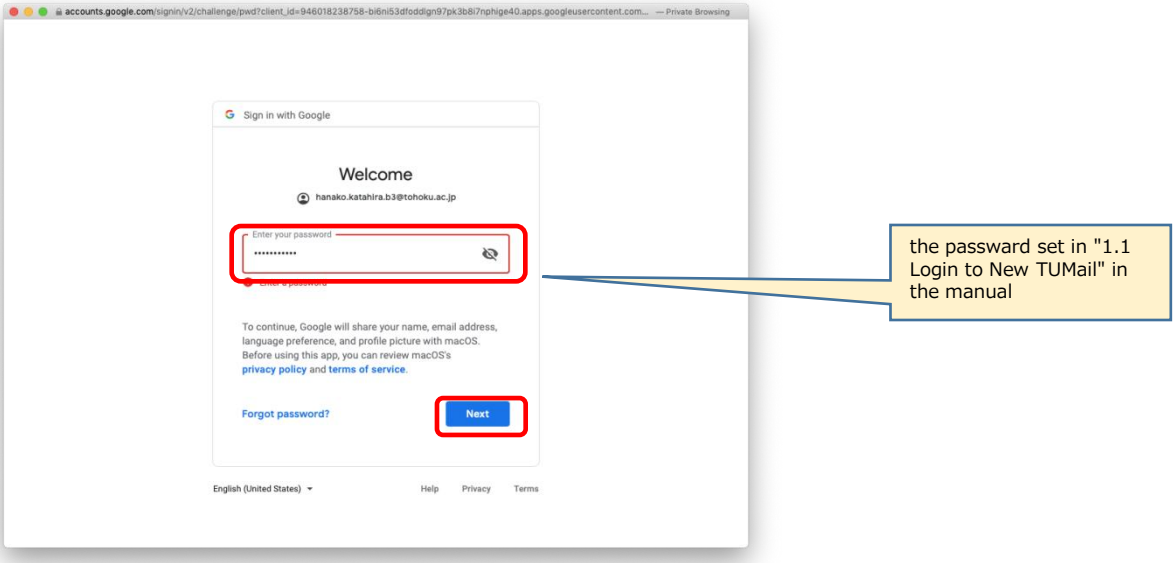

6. Select “Mail”, and click “Done”.

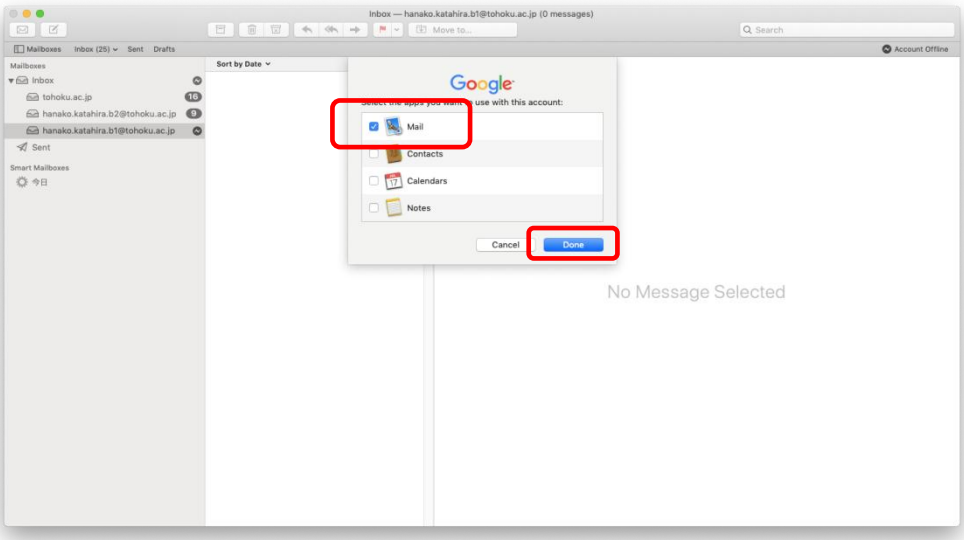

7. Confirm that your TUMail address has been added.



2.2. Email client setting (POP)

This item explains how to set up POP reception with email client.
The manual "1.4 POP / IMAP permission setting" needs to be done in advance.

If you set up to receive both new and current TUMail, email will be sent to both during 6 / 17-7 / 31.


2.2 Email client setting

2.2.2 Email client setting (POP)


2.2. Email client setting
2.2.2 POP reception setting

In this section, we will explain how to change the POP settings of TUMail to the POP settings of New TUMail (Gmail) using the email client Outlook for Mac.
The manual "1.4 POP / IMAP permission setting" and “1.5　Set up a client(Outlook etc.) that does not support OAuth 2.0” needs to be done in advance.


1. Click “Mail”, and click “Add Account”.

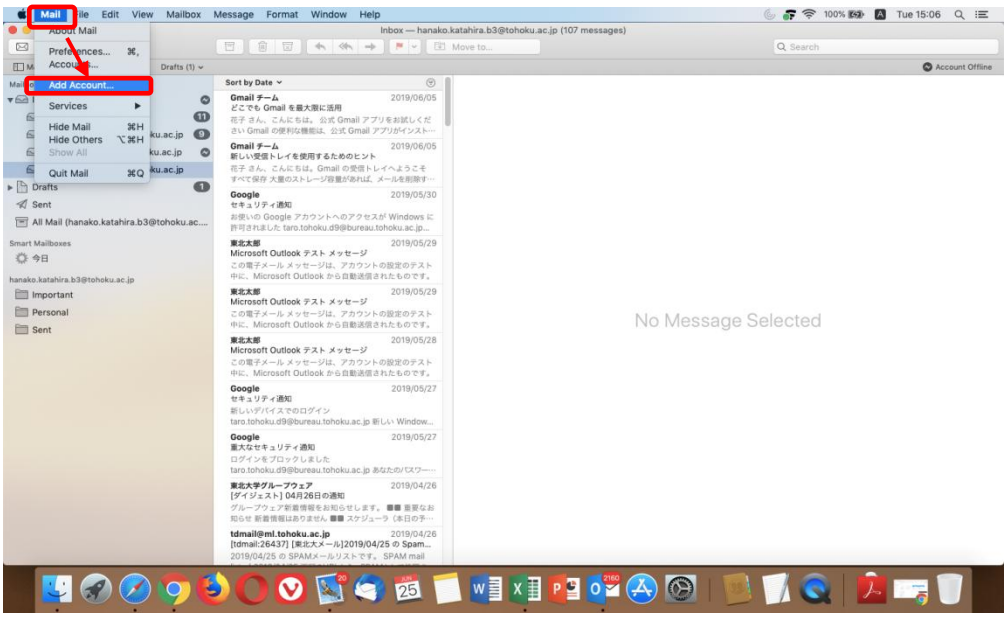

2.Click “Other Mail Account”, and click “Continue”.

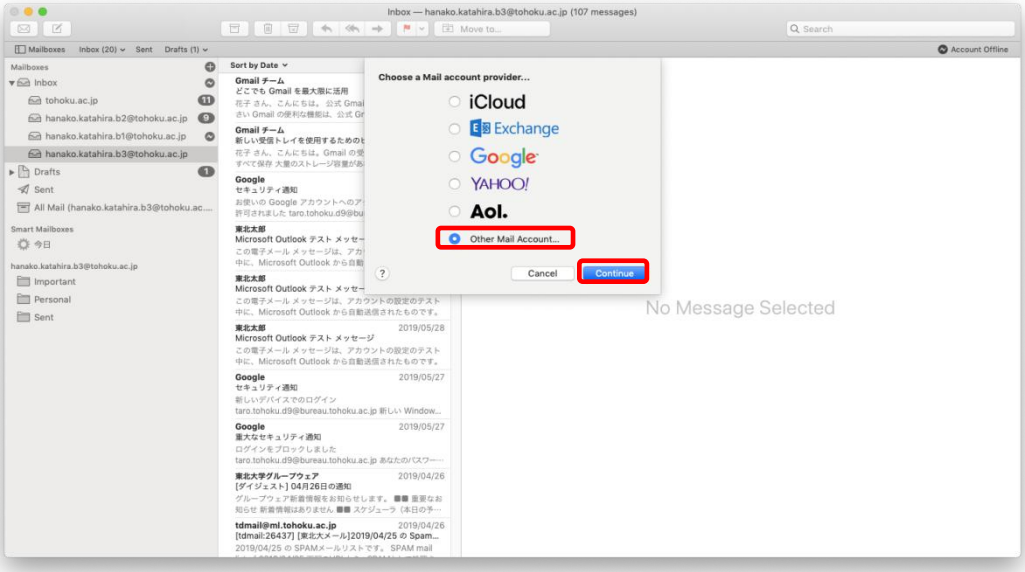


3. Set each item as follows, and click “Sign in”.

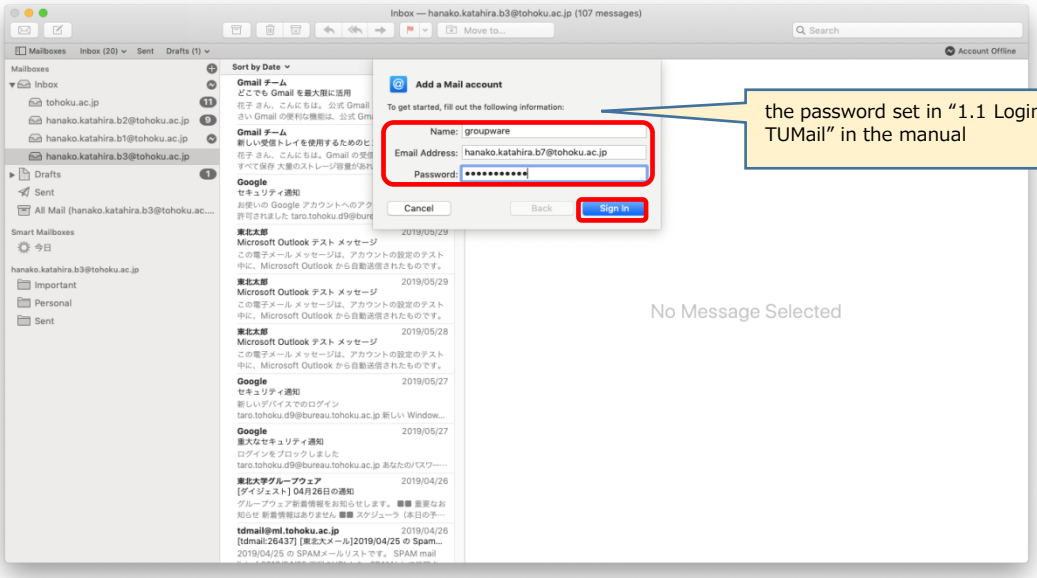


the password set in “1.1 Login to New TUMail” in the manual

4. If you see this window,

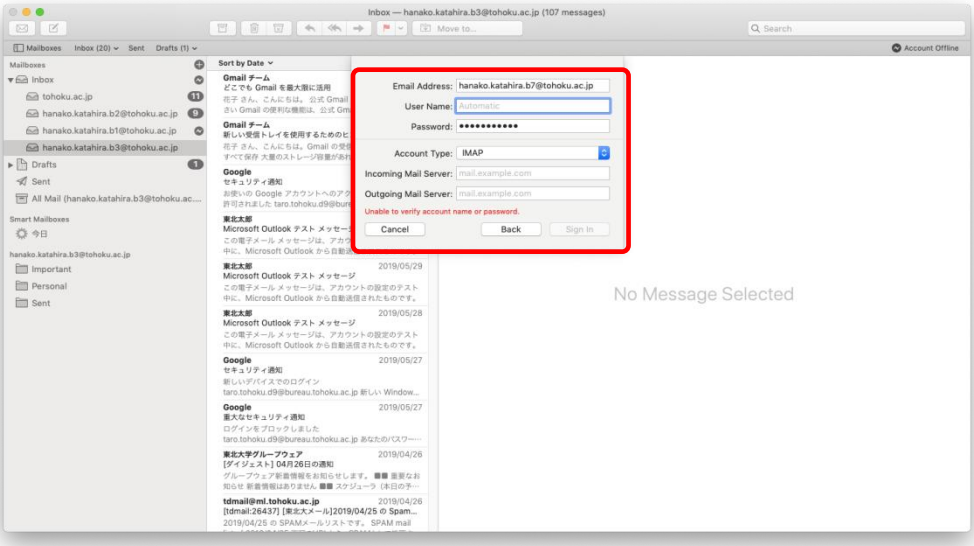


5. Set each item as follows, and click “Sign in”.

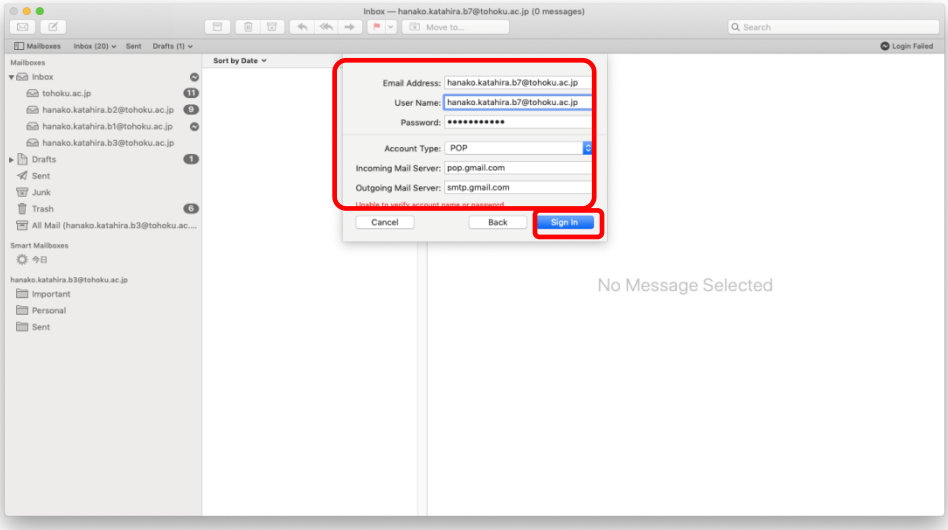

※ When you want to receive POP on multiple terminals , enter “recent:TUMail address”.

6. Confirm that your TUMail address has been added.

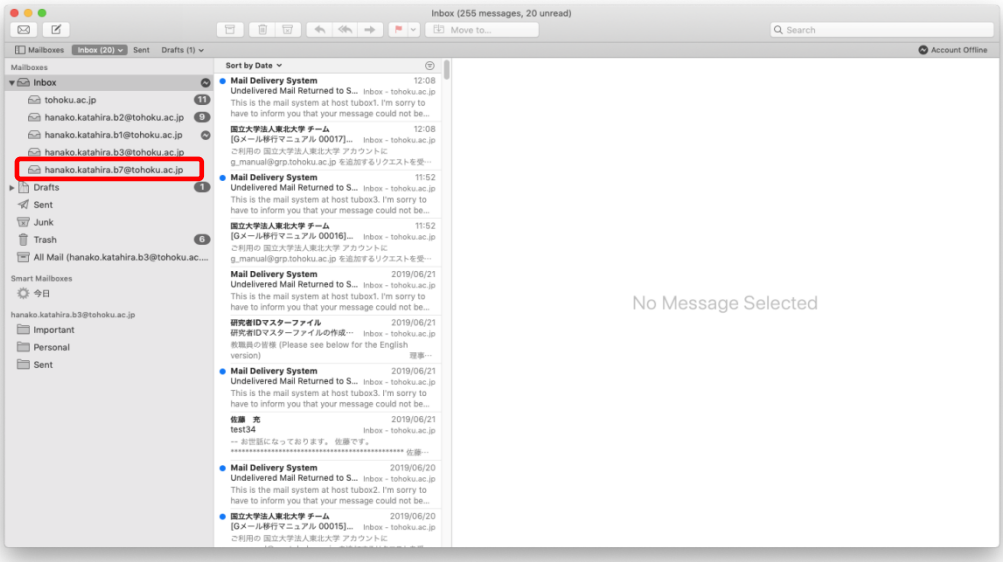

2.2. Email client setting
2.2.3 How to set sender as mailing list address

This section explains how to set up a group mail address as a sender in the email client Mac Mail App.
“2.2.1 IMAP reception setting”or”2.2.2 POP reception setting” needs to be done in advance in the manual.


The setting on the Gmail side is also required in the manual "2.1.4 (Gmail)How to set mailing list address as sender".

Please make settings according to this manual also when sending from alias address.
Also in this case, the manual "2.2.1 IMAP reception setting" or "2.2.2 POP reception setting" needs to be set.
The setting on the Gmail side is also required in the manual "2.1.4 (Gmail)How to set mailing list address as sender".


2.2.3 How to set sender as mailing list address

情報部情報推進課


1. Click “Mail”, and click “Preferences”.

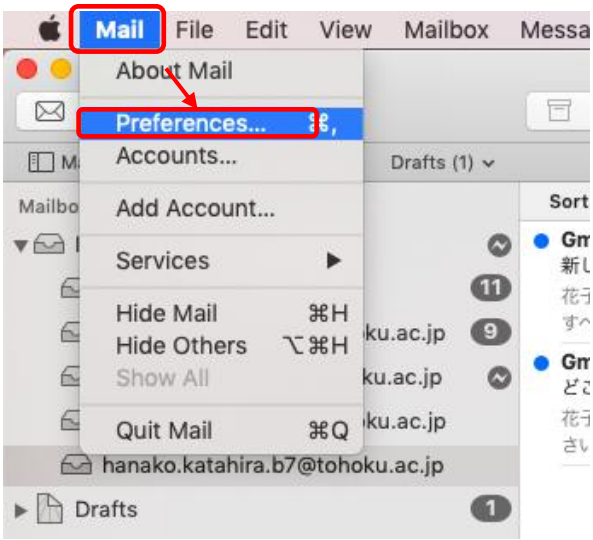


2. Click “Accounts”, and click your account.

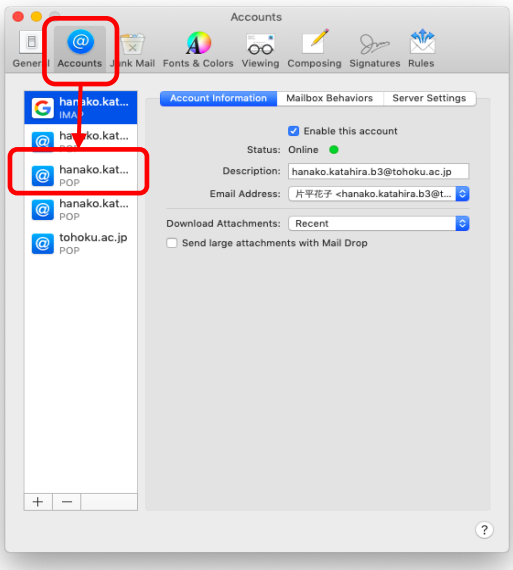


3. Click “Email Address”, and click “Edit Email Address”.

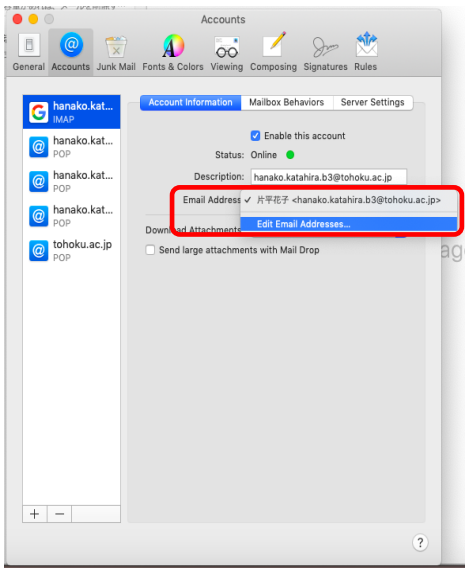


4. Click “+”.

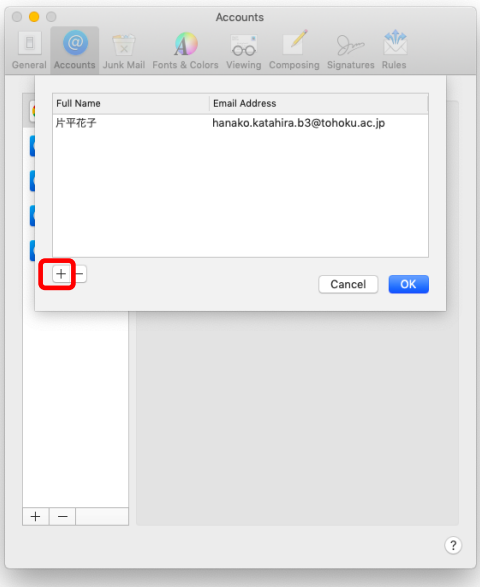

5. Set each item as follows, and click “OK”.

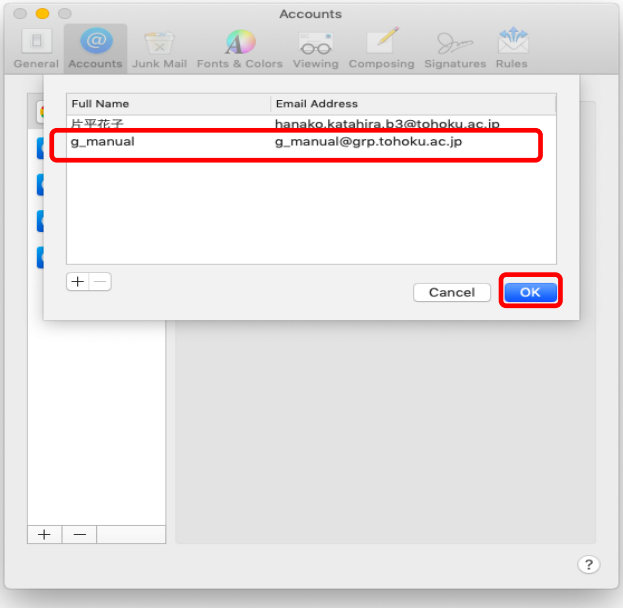

6. Exit the setting window.

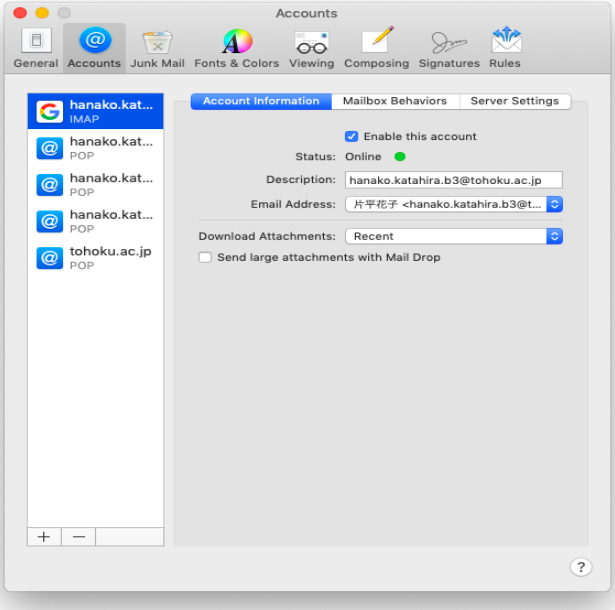

7. If you click on the sender on the mail composition window, you can select as follows.

